

DETERMINE RING SIZE

1. Prior to printing, ensure that your printer's scaling is set to 100% in your setup options.
2. Measure the bar at right to ensure it is exactly 2 inches long.
3. If measurement is not accurate, check that you are printing the page at full size and reprint before continuing.

CONFIRM PAGE SIZE




METHOD A - MEASURE FINGER WITH PAPER SIZER

1. Carefully cut along the outline of the sizer as well as the small slit at the left end of the sizer.
2. Wrap the sizer around the intended finger* with the numbers facing out.
3. Slide the pointed end of the sizer through the slit.
4. Move the sizer to the largest part of the finger, usually the knuckle.
5. Pull tightly. The sizer must fit snugly to produce an accurate size.
6. The number that lines up at the slit represents the ring size for that finger.

NOTES FOR ACCURATE FINGER MEASURING


Avoid measuring cold fingers as this is when fingers are at their smallest.

Measure your finger when it is at its largest, at the end of the day.



METHOD B - MEASURE WITH CURRENT RING

1. Select a ring that properly fits the intended finger*.
2. Place the ring over the circles below, matching the INSIDE size of the ring to the circle nearest in size.
3. If the ring falls between two sizes, order the larger size.

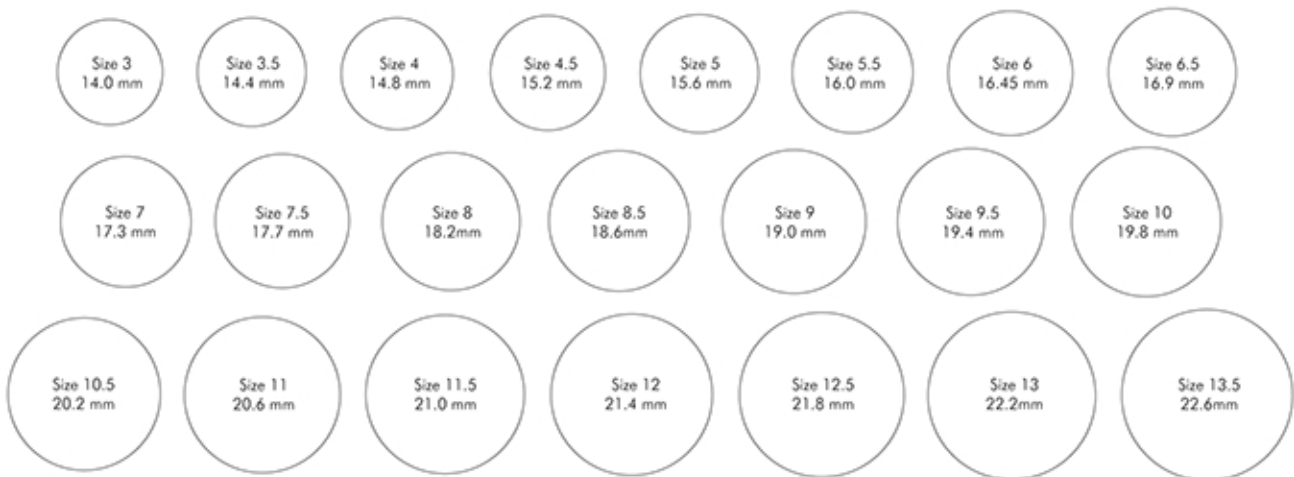

* The "ring finger" is located between the little finger and middle finger.
Engagement and wedding rings are traditionally worn on the ring finger of the left hand.